

FRANKLIN

# GATES AND GATE HARDWARE



#### **FRANKLIN HISTORY**

Franklin gate systems were established over 60 years ago. From day one the goal has been to continuously meet customers' needs through a focus on innovation, quality and customer service. Franklin works closely with field representatives and farmers to ensure this goal is met.



Franklin's commitment to ongoing research and development ensures products are specifically designed with a practical understanding of farmers' requirements. Franklin Gates and Gate Hardware are strong, reliable and fit for your farm.

#### **FETTLING**



Dangerous edges are removed in the final stage of production by fettling. This gives a smooth and high quality finish.

#### ONE PIECE ADJUSTABLE GATE CLAMP



For improved strength and longer life, one piece adjustable clamps are added to the top and bottom of selected gates.

#### **FLAT VERTICAL STAYS**



To add maximum strength to the infill of the gate - the Franklin Kiwimaster, Fieldmaster and Stockmaster gates all have flat vertical stays welded to their frames.

## FRANKLIN GALVANISED GATES

#### INSIST ON FRANKLIN GATES FOR:

A COMPLETE RANGE - 10 different gate models to suit a wide range of farming situations.

**GOOD PRACTICAL DESIGN - for easy hanging of gates.** 


STRENGTH AND DURABILITY - strong yet light to hang with 25mm pipe frame, solid rod, flat infill and adjustable clamps allowing for gateway movement.

NZ MADE PRODUCT - manufactured to strict design specifications and tolerances, using top quality New Zealand steel.

RUST FREE - fully hot dip galvanised to prevent rust and keep the gates looking good year after year.

**5 YEAR WARRANTY** - from 1 October 2018 a market leading 5 year warranty was introduced on all Franklin gates and gate hardware.





The heaviest, strongest Franklin gate is ideal for farming situations where maximum strength is required. Often used on boundaries around yards and raceways where higher levels of stock pressure are likely to occur.

- 25mm nominal bore pipe frame
- 5 x 20mm nominal bore pipe horizontal bars
- 40mm flat support uprights
- 2 x 9.5mm diagonal support bars
- 2 x 20mm heavy duty adjustable hinge clamps top and bottom
- Split link latch attachment
- Fully hot tip galvanised inside and out

[ / m	marien.	(m)	maran:	(4+)	EMBIT!

F4110	10	3.05	1.05
F4112	12	3.66	1.05
F4114	14	4.27	1.05
*F4115	15	4.57	1.05
*E/116	16	1 88	1.05

\*Made to order

#### **STOCKMASTER**

A heavy duty gate designed for containing bulls or heavy stock loading areas

- · 25mm nominal bore pipe frame
- 6 x 9.5mm horizontal bars
- 25mm flat support uprights
- 7.5mm diagonal support bar
- 2 x 20mm heavy duty adjustable hinge clamps top and bottom
- Split link latch attachment
- Fully hot tip galvanised inside and out

#### LENGTH (ft) LENGTH (m) HEIGHT (m)

**HEAVY WEIGHT GATE** 

		()		
	F3310	10	3.05	1.05
	F3311	11	3.35	1.05
	F3312	12	3.66	1.05
	F3313	13	3.96	1.05
	F3314	14	4.27	1.05
	F3315	15	4.57	1.05
	*F3316	16	4.88	1.05
ı				

\*Made to order

#### **FIELDMASTER**

A medium weight gate used in a wide variety of applications such as dairy farming, sheep and dry stock farming.

#### 25mm nominal bore pipe frame

- 6 x 7.5mm horizontal bars
- 25mm flat support uprights
- 7.5mm diagonal support bar
- 2 x 20mm heavy duty adjustable hinge clamps top and bottom
- Split link latch attachment
- Fully hot tip galvanised inside and out

#### LENGTH (ft) LENGTH (m) HEIGHT (m)

**MEDIUM WEIGHT GATE** 

F3210	10	3.05	1.05
F3211	11	3.35	1.05
F3212	12	3.66	1.05
F3213	13	3.96	1.05
F3214	14	4.27	1.05
F3215	15	4.57	1.05
F3216	16	4.88	1.05

#### KIWIMASTER MEDIUM WEIGHT GATE



Suitable as a general purpose gate for most farming applications, the Kiwimaster Gate offers durability and value for money.

- 25mm nominal bore pipe frame
- 5 x 6mm horizontal bars
- · 25mm flat support uprights
- 7.5mm diagonal support bar
- 2 x 20mm heavy duty adjustable hinge clamps top and bottom
- Split link latch attachment
- Fully hot tip galvanised inside and out

LENGTH	(ft)	LENGTH	(m)	HEIGHT	(m)

F3906	6	1.82	1.00
F3907	7	2.13	1.00
F3908	8	2.44	1.00
F3909	9	2.74	1.00
F3910	10	3.05	1.00
F3911	11	3.35	1.00
F3912	12	3.66	1.00
F3913	13	3.96	1.00
F3914	14	4.27	1.00
F3915	15	4.57	1.00



#### **PIPE AND NETTING**




A medium weight, versatile, general purpose gate that is light and easy to handle yet strong enough to contain animals of all varieties.

- 25mm nominal bore pipe frame
- 25mm nominal bore pipe support uprights
- 75mm x 75mm x 3.15mm chainlink mesh
- Two weld on hinges manufactured from heavy duty flat steel
- · Split link latch attachment
- Fully hot tip galvanised inside and out

#### MEDIUM WEIGHT GATE

LE	NGTH (TT)	LENGTH (m)	HEIGHT (M)
F3503	3' 5"	1.06	1.00
F3505	5	1.52	1.00
F3506	6	1.82	1.00
F3507	7	2.13	1.00
F3508	8	2.44	1.00
F3509	9	2.74	1.00
F3510	10	3.05	1.00
F3511	11	3.35	1.00
F3512	12	3.66	1.00
*F3513	13	3.96	1.00
F3514	14	4.27	1.00
*F3516	16	4.88	1.00
*Made to orde	er		

**ARENA MEDIUM WEIGHT GATE** 



Designed as a solution for the equine market, the Arena gate is a medium weight gate, light and easy to handle yet strong enough to contain animals of all varieties.

- 25mm nominal bore pipe frame
- 9.5mm bar supports
- 100mm x 100mm x 5mm
- welded steel mesh
- 1 x 20mm adjustable hinge clamp (top)
- 1 x weld on hinge manufactured from heavy duty flat steel (bottom)
- Split link latch attachment
- Fully hot-dip galvanised.


#### LENGTH (ft) LENGTH (m) HEIGHT (m)

*F4312	12	3.66	1.00
*F4314	14	4.27	1.00

\*Made to order



#### **BARRED DEER MEDIUM WEIGHT GATE**

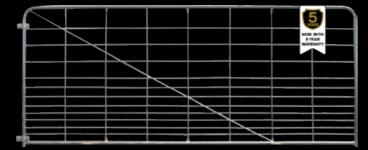

The Barred Deer gate is one of the most popular deer gates used in New Zealand. Offering an ideal blend of strength, durability, and value for money.

#### LENGTH (ft) LENGTH (m) HEIGHT (m) F9112

F9114

12

14

3.66

4.27


1.88

1.88

- 25mm nominal bore pipe frame

13 x 6mm horizontal bars

- Support uprights: 4 x 6mm
- 3 x 25mm flat
- · 7.5mm diagonal support bar
- 2 x 20mm heavy duty adjustable hinge clamps top and bottom
- Fully hot tip galvanised inside and out

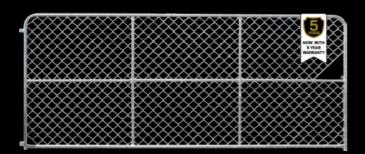

Deermaster Chainlink gates offer the ideal combination of stock proofing and value for money.

- · 25mm nominal bore pipe frame
- 25mm nominal bore pipe internal frame
- 75mm x 75mm x 3.15mm chainlink mesh
- Two weld on hinges manufactured from heavy duty flat steel
- · Split link latch attachment
- Fully hot tip galvanised inside and out

LENGTH (	ft)	LENGTH (	(m)	HEIGHT	(m)	ì
----------	-----	----------	-----	--------	-----	---

F9212	12	3.66	1.50
F9310	10	3.05	1.88
F9312	12	3.66	1.88
F9314	14	4.27	1.88
F9316	16	4.88	1.88

#### VERTICAL BAR HEAVY WEIGHT GATE



This is a truly versatile gate. Vertical bars make it difficult to climb over so the gate is suitable for use in calving and pig sheds. Additionally, the stylish design makes these gates ideal for use as property entrance gates in rural or urban environments.

- · 25mm nominal bore pipe frame
- 7.5mm bar uprights at 100mm spacings
- 2 x 7.5mm diagonal support bars
- 2 x 20mm adjustable hinge clamps top and bottom
- · Split link latch attachment
- Fully hot tip galvanised inside and out

LENGTH (ft)	LENGTH (m)	HEIGHT (m	

	LENGIN (IL)	LENGIN (III	) NEIGNI (III)
F3703	3'6"	1.06	1.00
F3705	5	1.52	1.00
F3706	6	1.82	1.00
F3707	7	2.13	1.00
F3708	8	2.44	1.00
F3709	9	2.74	1.00
F3710	10	3.05	1.00
F3711	11	3.35	1.00
F3712	12	3.66	1.00
F3714	14	4.27	1.00
*F3716	6 16	4.88	1.00

#### **DOMESTIC GATE (50MM MESH)**

# SECONDARY MARINATE

A medium weight, versatile, domestic and general purpose gate that is light and easy to handle

- 25mm nominal bore pipe
- 25mm nominal bore pipe support uprights
- 50mm x 50mm x 2.5mm chainlink mesh
- Two weld on hinges manufactured from heavy duty flat steel
- · Split link latch attachment
- · Fully hot-dip galvanised.

#### **MEDIUM WEIGHT GATE**

	LENGTH (ft)	LENGTH (m)	HEIGHT (m
F3603	3'6"	1.06	1.00
F3605	5	1.52	1.00
F3606	6	1.82	1.00
F3607	7	2.13	1.00
F3608	8	2.44	1.00
F3609	9	2.74	1.00
F3610	10	3.05	1.00
*F3612	12	3.66	1.00
*F3614	14	4.27	1.00
*Made to o	rder		


### FRANKLIN GATE HARDWARE


# INSIST ON FRANKLIN GATE HARDWARE FOR:

**QUALITY - enhanced electroplating process delivers improved corrosion resistance** 

**BUILT TO LAST - 5 year manufacturers** warranty on all products









#### **THRU POST GUDGEON**




for securing gate to hinge.

# F0131 CODE A B C STANDARD F0123 150 16 30 F0124 225 16 40 F0125 300 16 40 HEAVY DUTY F0131 300 20 50 F0132 375 20 50 F0133 450 20 50 F0134 600 20 50

#### **CONCRETE POST SET** (one size fits all) SINGLE WAY F0170 TWO WAY F0180 .... .... .... CODE CODE В В F0170 125-200 50 F0180 125-200 50




#### **WELD ON SOCKET AND PIN**



40
40
40
40
70

\* Long pin with Ø 8mm hole for securing gate to hinge.

#### **WELD ON PLATE GUDGEON**



CODE	A	В
F0241*	20	70
F0242	16	40

\* Long pin with Ø 8mm hole for securing gate to hinge.

#### **BOLT ON DOUBLE PIN GUDGEON**



CODE	A	В	C
=0308	930	120	100

- Gate hanging made easy, just level off and drill
- One long pin with security hole to lock gate onto the bracket
- Bolt to concrete walls, 100 x 100 square wooden posts and places where standard 20mm gudgeons are too large or difficult to fit.

#### **ADJUSTABLE GATE CLAMP**

F0224/F0229

F0225 F0230



CODE	A	В
F0224	20 NB	16
F0225	25 NB	20
F0229	25 NB	20
F0230	25 NB	20


#### **GATE FASTENER**

F0201 

F0203



F0207



F0207



F0212

F0213

F0214

F0221



F0201 JP Gate Fastener with

Chain and Staple

F0203 LP Gate Fastener with Chain and Staple

LP Gate Fastener with Heavy Chain (1m long)

F0210 Sheepyard Hook and Staple

F0212

Stockyard Fastener and Staple

F0213 JP/LP Spare Staple

F0214 Stockyard Spare Staple

F0221 Pipe Clamp

#### **DOUBLE GATE FASTENER**

F0208



F0208

For 25mm NB pipe

NOW WIT 5 YEAR MARRANT

F0209


For 32mm NB pipe

#### **KIWITAH-STEEL POST**



- Hot-dip galvanised multi-use steel standard
- Easy to install and maintain
- High strength in all applications
- · Available in seven and eight hole configurations and lengths of 1650 and 1800mm
- Can be used in conventional and both portable and permanent electric fencing systems.

#### **SCREW ANCHOR**



TYPICAL	LENGTH IN
LOAD IN	METRES
TONNES	(FEET)

DOORTE HET	X	
F2505	2	1.20 (4'0")
F2515	3	1.38 (4'6")

\*Double helix will increase anchoring load capacity by fifty percent.

SINGLE HELIX		
F2501	1.25	1.20 (4'0")
F2511	2	1.38 (4'6")



#### **FRANKLIN GATES**

TEL +64 7 838 9800 FAX +64 7 838 9801 FREE PHONE + 0800 731 500

**EMAIL** sales@franklinsystems.co.nz www.franklinsystems.co.nz

181 Kahikatea Drive, Hamilton 3206, New Zealand. Private Bag 3026, Hamilton 3240, New Zealand.